



Surface

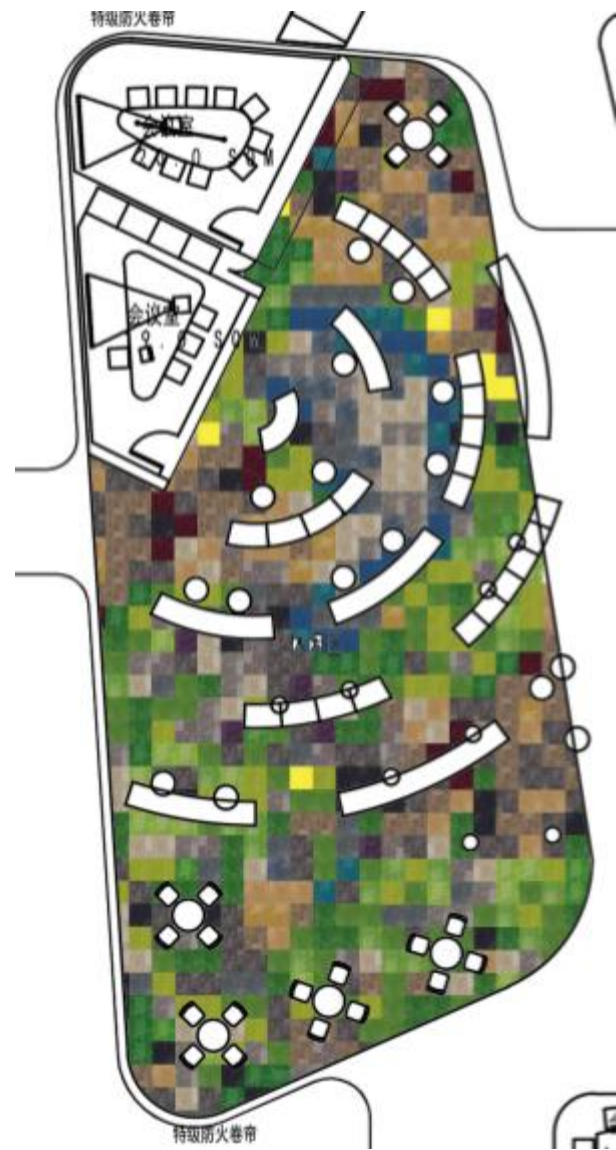


## Specification

Style name:	<b>Surface</b>
Construction:	Multi-level Loop
Fiber:	Nylon
Gauge:	1/12"
Stitches:	11 per inch
Pile Weight:	20 oz/yd <sup>2</sup>
Average Pile Weight:	4mm±0.5mm
Backing:	PVC
Tile size:	50*50cm
Static Propensity	≤3.5 kV (AATCC 134, GB/T18044-2008)
Flammability	Passes (ASTM E648, GB8624-2012)
Smoke Density	Passes (ASTM E662, GB8627-1999)


Approved Installation Methods:



Monolithic



Quarter-turn



Brick



#01



#02



#03



#04



#05



#06



#07



#08